


Plastic Resins



Available plastic resins with maximum temperature tolerance.

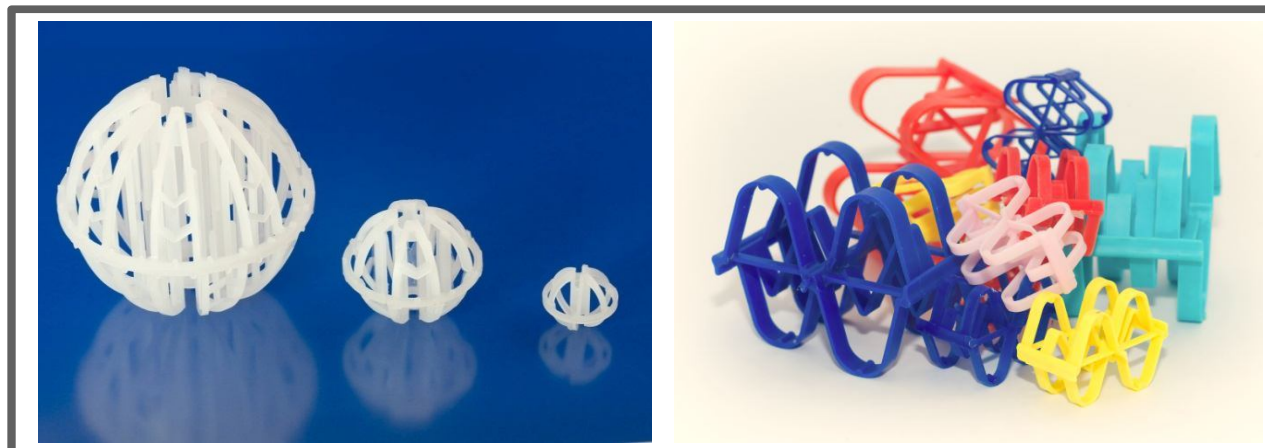

Plastic Resin	Maximum T, °F	Maximum T, °C
Polyvinyl Chloride, PVC	140	60
Polyethylene, PE	180	82
Polypropylene, PP	180	82
Corzan™, CPVC	230	110
CPVC	210	99
Polypropylene, 10 – 30% Glass Filled, PP-G	210 - 230	99 - 110
Noryl™, PPO	230	110
Kynar®, PVDF	280	138
Halar®, ECTFE	290	143
Tefzel®, ETFE	350	177
Teflon®, PFA	400	204
Tefzel®, 25% Glass Filled, ETFE-G	410	210

For more information and design assistance, please contact us at:

Raschig USA, Inc.
Formerly Raschig Jaeger Technologies
 2201 E. Lamar Blvd. #240
 Arlington, TX 76006
 800-678-0345
 817-695-5680
info@raschig-usa.com

IMPORTANT: The following supercedes Buyer's Documents. SELLER MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, INCLUDING OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. No statements herein are to be construed as inducements to infringe any relevant patent. Under no circumstances shall Seller be liable for incidental, consequential or indirect damages for alleged negligence, breach of warranty, strict liability, tort or contract arising in connection with the product(s). Buyer's sole remedy and Seller's sole liability for any claims shall be Buyer's purchase price. Data and results are based on controlled or lab work and must be confirmed by Buyer by testing for intended conditions of use. The product(s) has not been tested for, and is therefore not recommended for, uses for which prolonged contact with mucous membranes, abraded skin, or blood is intended; or for uses for which implantation within the human body is intended.